

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
17 March 2005 (17.03.2005)

PCT

(10) International Publication Number  
**WO 2005/024254 A1**

(51) International Patent Classification: F16B 41/00,  
23/00

(21) International Application Number:  
PCT/GB2004/003734

(22) International Filing Date:  
2 September 2004 (02.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0320521.8 2 September 2003 (02.09.2003) GB

(71) Applicant and  
(72) Inventor: CHENG, Michael, Keith (GB/GB); 5 Bulkeley  
Close, Englefield Green, Surrey TW20 0NS (GB).

(74) Agent: HARRISON GODDARD FOOTE; Belgrave  
Hall, Belgrave Street, Leeds LS2 8DD (GB).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: ANTI-TAMPER DEVICE

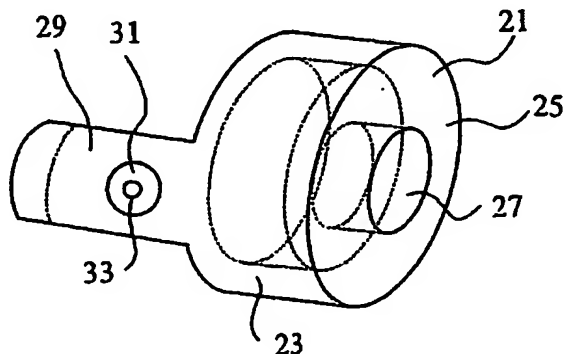

(57) Abstract: A device is provided for preventing the removal of or tampering with a construction fitting (1) having two construction element engaging components (5, 7) which are interconnected by a nut and bolt fastener (9, 13). The device comprises a body portion (21) for at least partly covering the nut (13) of the fastener. The body portion extends from said nut (13) to a position alongside the bolt (9) between the two construction element engaging components of the fitting (1). The device further includes locking means (31, 53) which are movable relative to the body portion (21) to effect locking in position of the device around the fitting (1).

WO 2005/024254 A1